



SPORT ARENAS

CHARACTERISTICS OF THE LINE
IN CONFORMITY WITH EN 15312



PRODUCTS SUGGESTION



6401



6402



6403



6404



6405



6410




6411




6310

ELEMENTS OF THE PRODUCT

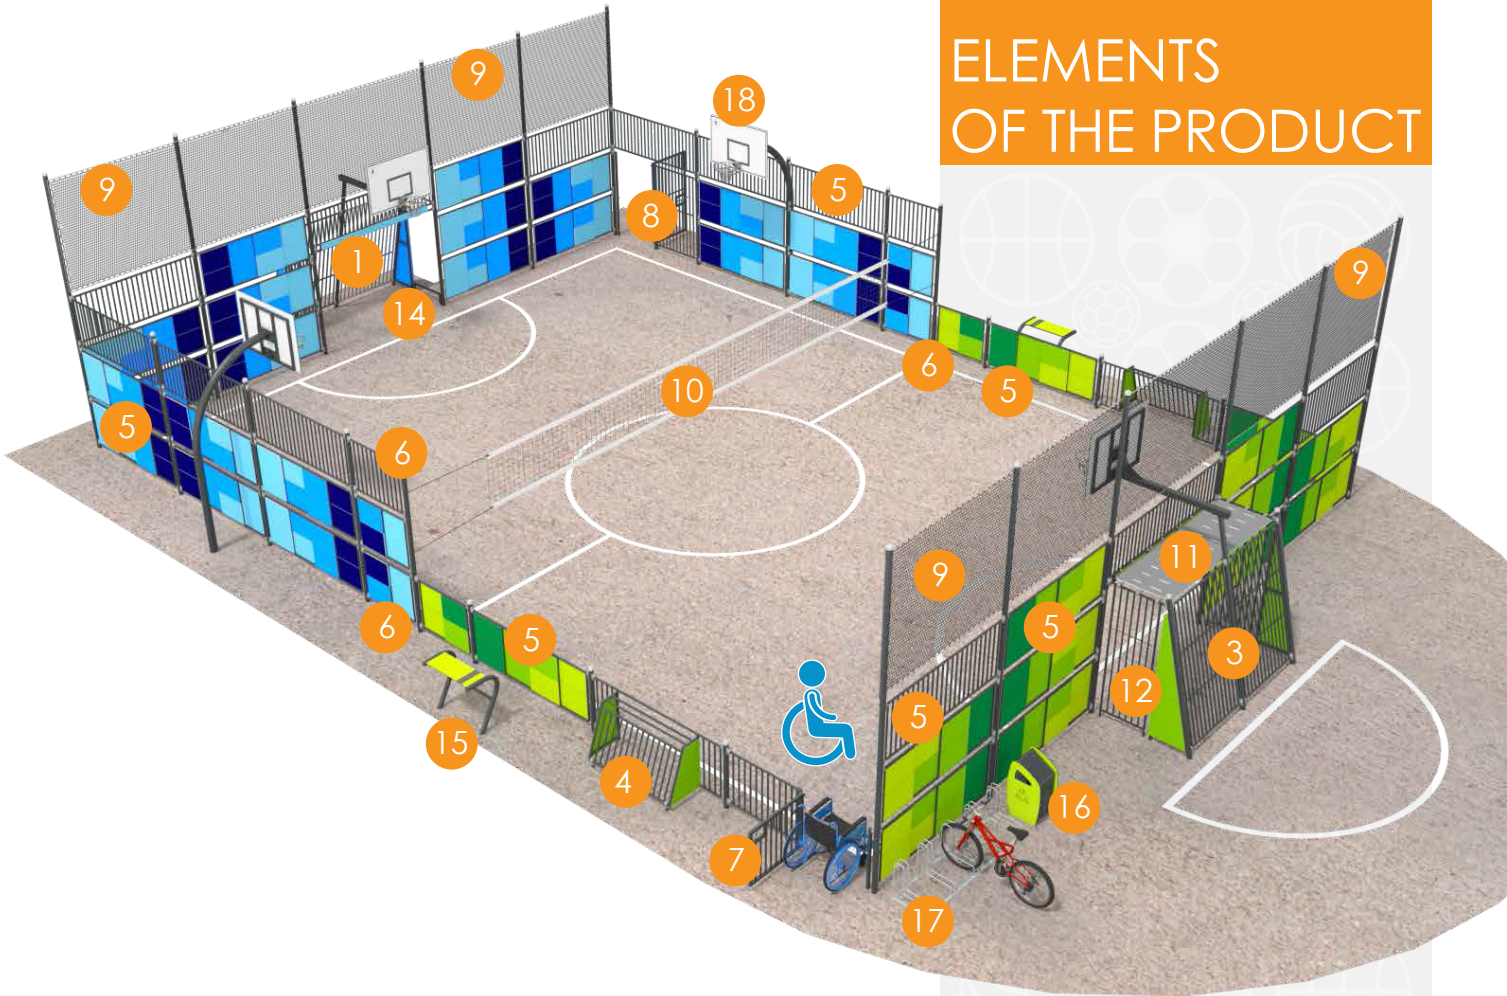

1

6410



2

S01-R7016




3

S02-R7016




4

S11-R7016




5

S21-R7016, S22-R7016




6

S23-R7016, S24-R7016




7

S31-R7016, S32-R7016



8

S33-R7016




9

S61-R7016




10

S62-R7016




11

S51-R7016




12

S41-R7016



13

S42-R7016



14

S43-R7016



15

6031



16

6054



17

6061




18


6310



ARENA MODULES

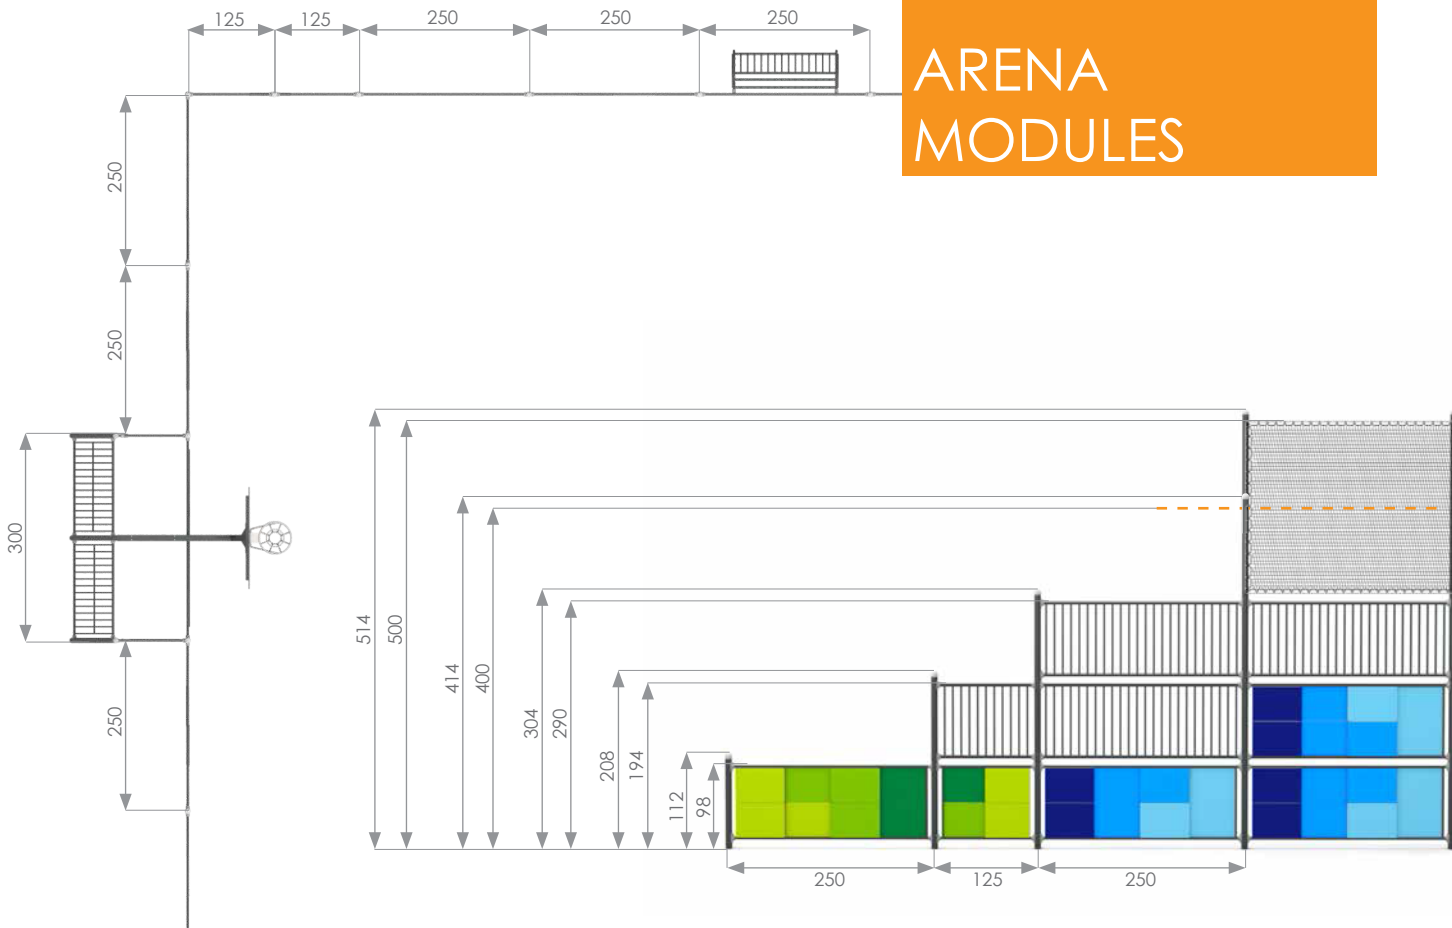

SPANS

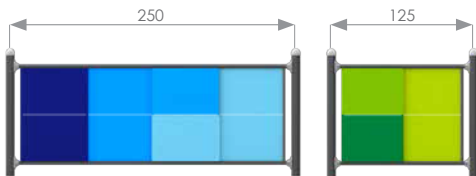

- filled in with 15 mm thick HDPE panels




- filled in with steel profiles

COLOURS OF HDPE PLATES



EXTRA ELEMENTS

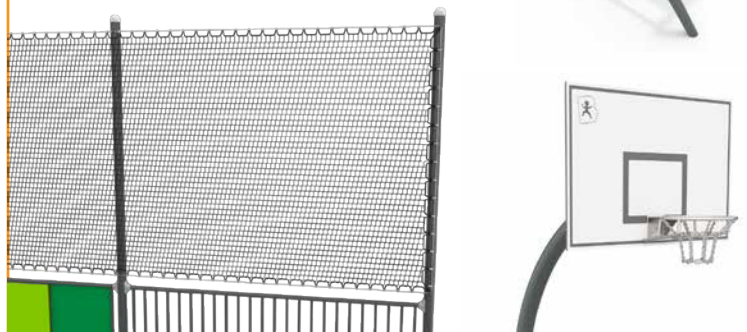

6410


Dimensions: 308 x 325 x 385 cm
Diameter of the basket hoop: 47,1 cm

- Dimensions of pipes and profiles used:
- » rectangular profile: 90x90x3; 40x40x2; 20x20x2 mm
 - » flat bar: 60x6, 100 x 6 mm
 - » pipe: Ø 33,7 x 2,9; 33,7 x 2; 20 x 2; 21,3 x 2; 17,2 x 2 mm
 - » supporting column: Ø 76,1 x 2,6 mm
 - » stainless steel chain: f15 mm

- options of HDPE plates:



- options of RAL:

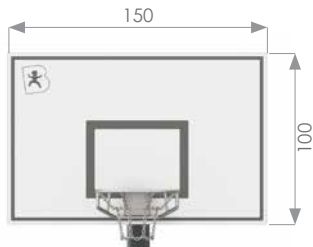

ARENA MODULEY



MATERIALS

- Construction of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.
- of system connectors made of strong aluminum alloy. Aluminum is secured by the process of electrophoresis and powder coating with polyester paint UV resistant and QUALICOAT attested.
- Plates made of triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp-proof and resistant to UV.

- options of HDPE plates:



- options of RAL:



MODULE S01-R7016

Dimensions: 308 x 167 x 304 cm

- Dimensions of pipes and profiles used:
- » rectangular profile: 20x20x2. 40x40x2 mm
 - » pipe: Ø 33,7 x 2,9; 33,7 x 2 mm
 - » supporting column: Ø 76,1 x 2,6 mm




MODULE S02-R7016

Dimensions: 308 x 498 x 385 cm
Diameter of the basket hoop: 47,1 cm

- Dimensions of pipes and profiles used:
- » rectangular profile: 90x90x3; 40x40x2; 20x20x2 mm
 - » flat bar: 60x6 mm
 - » pipe: Ø 33,7 x 2,9 mm; 33,7 x 2; 20 x 2; 21,3 x 2; 17,2 x 2 mm
 - » supporting column: Ø 76,1 x 2,6 mm
 - » stainless steel chain: f15 mm



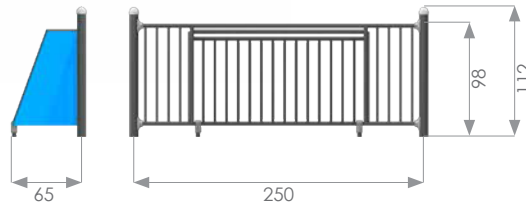

MODULE S11-R7016

Dimensions: 250 x 65 x 112 cm

Dimensions of pipes and profiles used:
 » rectangular profile: 20x20x2 mm
 » pipe: Ø 33,7 x 2,9 mm
 » supporting column: Ø 76,1 x 2,6 mm

MATERIALS

- Construction of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.
- System connectors made of strong aluminum alloy. Aluminum is secured by the process of electrophoresis and powder coating with polyester paint UV resistant and QUALICOAT attested.
- Plates made of triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp-proof and resistant to UV.

options of HDPE plates:




options of RAL:



MODULE S21-R7016

Dimensions: 250 x 8,3 x 112 cm


Dimensions of pipes and profiles used:
 » rectangular profile: 20x20x2 mm
 » supporting column: Ø 76,1 x 2,6 mm
 » pipe: Ø 33,7 x 2,9 mm

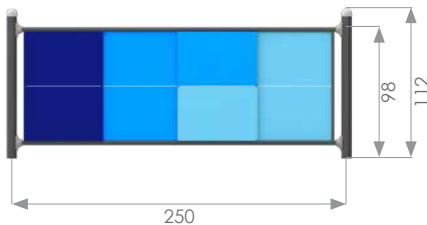

MODULE S23-R7016

Dimensions: 125 x 8,3 x 112 cm


Dimensions of pipes and profiles used:
 » rectangular profile: 20x20x2 mm
 » supporting column: Ø 76,1 x 2,6 mm
 » pipe: Ø 33,7 x 2,9 mm



MODULE S22-R7016

Dimensions: 250 x 8,3 x 112 cm


Dimensions of pipes and profiles used:
 » rectangular profile: 20x20x2 mm
 » supporting column: Ø 76,1 x 2,6 mm
 » pipe: Ø 33,7 x 2,9 mm

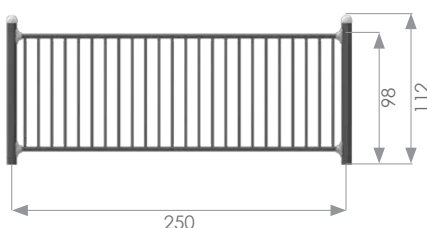

MODULE S24-R7016

Dimensions: 125 x 8,3 x 112 cm

Dimensions of pipes and profiles used:
 » rectangular profile: 20x20x2 mm
 » supporting column: Ø 76,1 x 2,6 mm
 » pipe: Ø 33,7 x 2,9 mm



MATERIALS

- Construction of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.
- System connectors made of strong aluminum alloy. Aluminum is secured by the process of electrophoresis and powder coating with polyester paint UV resistant and QUALICOAT attested.

options of RAL:






MODULE S31-R7016

Dimensions: 250 x 8,3 x 112 cm

- Dimensions of pipes and profiles used:
- » rectangular profile 60x60x2; 40x40x2; 20x20x2 mm
 - » supporting column: Ø 76,1 x 2,6 mm
 - » pipe: Ø 33,7 x 2,9; 21,3 x 2; 17,2 x 2 mm

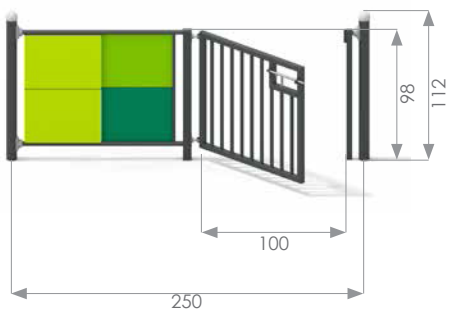

MATERIALS

- Construction of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.
- of system connectors made of strong aluminum alloy. Aluminum is secured by the process of electrophoresis and powder coating with polyester paint UV resistant and QUALICOAT attested.
- available to lock it with a padlock
- plates made of triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp-proof and resistant to UV.

options of HDPE plates:



options of RAL:



MATERIALS

- Construction of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.
- of system connectors made of strong aluminum alloy. Aluminum is secured by the process of electrophoresis and powder coating with polyester paint UV resistant and QUALICOAT attested.

- available to lock it with a padlock


options of RAL:



MODULE S33-R7016

Dimensions: 250 x 8,3 x 208 cm


- Dimensions of pipes and profiles used:
- » rectangular profile 60x60x2; 40x40x2; 20x20x2 mm
 - » supporting column: Ø 76,1 x 2,6 mm
 - » pipe: Ø 33,7 x 2,9; 21,3 x 2; 17,2 x 2 mm

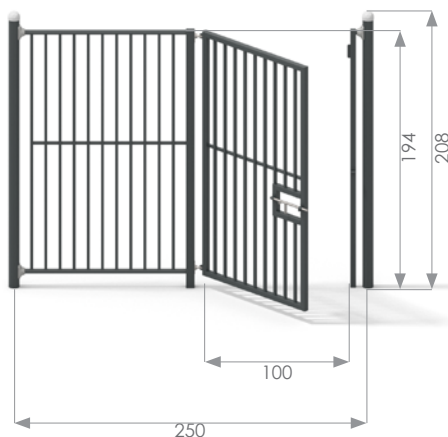

MODULE S32-R7016

Dimensions: 250 x 8,3 x 112 cm


- Dimensions of pipes and profiles used:
- » rectangular profile 60x60x2; 40x40x2; 20x20x2 mm
 - » supporting column: Ø 76,1 x 2,6 mm
 - » pipe: Ø 33,7 x 2,9; 21,3 x 2; 17,2 x 2 mm

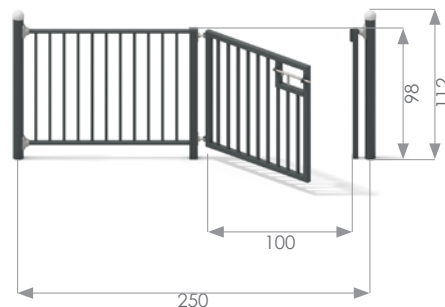

MODULE

S61-R7016

High-quality polypropylene PP net, with 4,5 x 4,5 cm loops and thickness 3 mm. Manufactured using a non-knot technique for optimal durability and stability. Strain of the net can be adjusted accordingly. Colour: black.

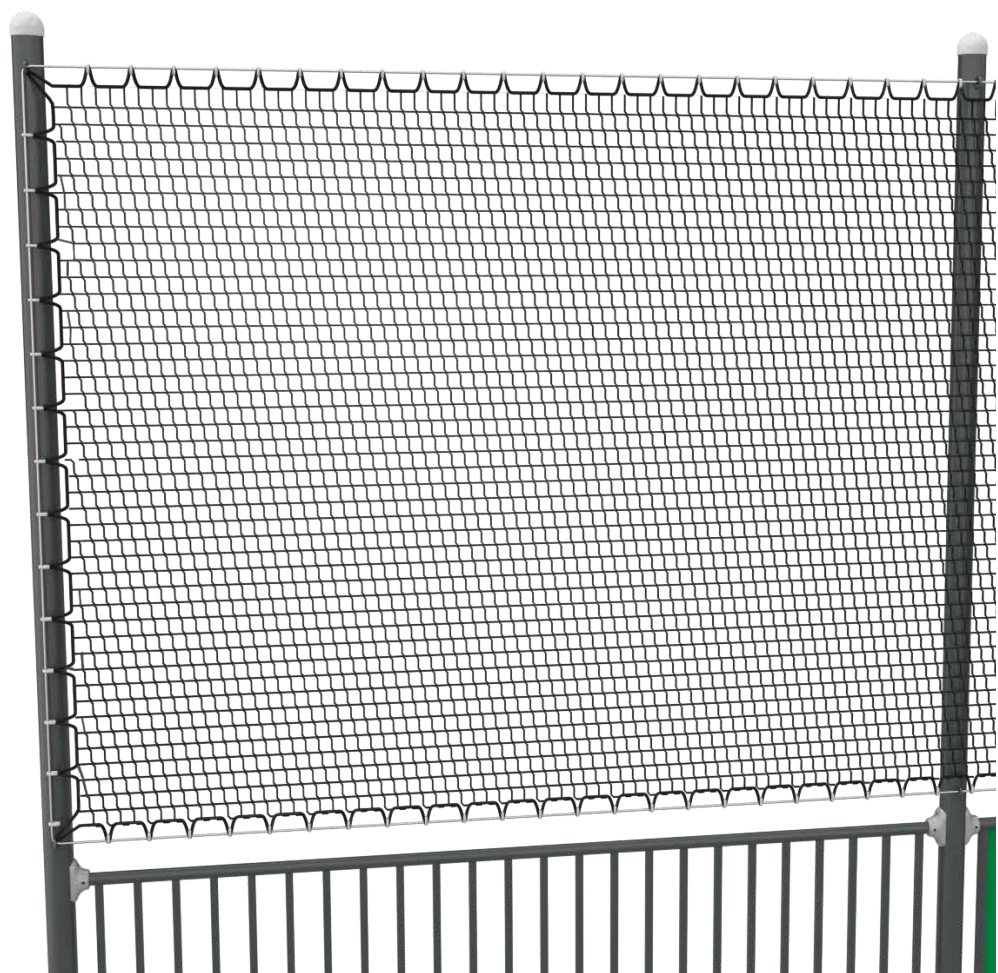





MODULE

S62-R7016

High-quality polypropylene net used for playing volleyball. The net conforms to the norms of FIVB (International Volleyball Federation).

Dimensions of the net: 850 x 100 cm

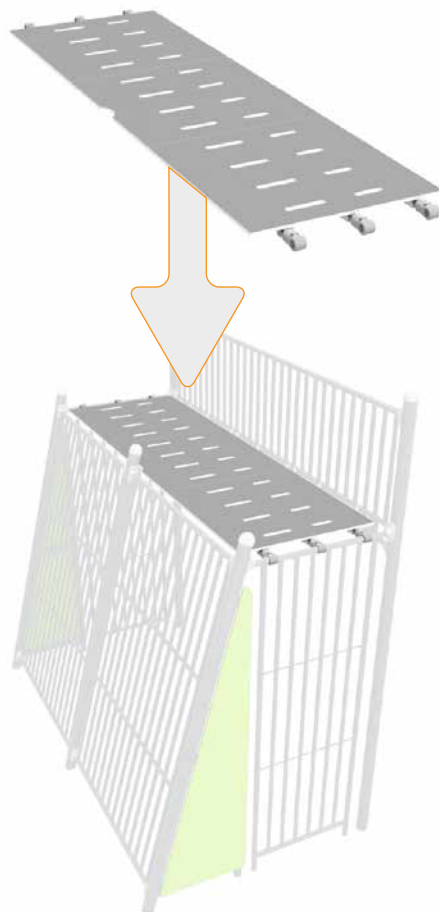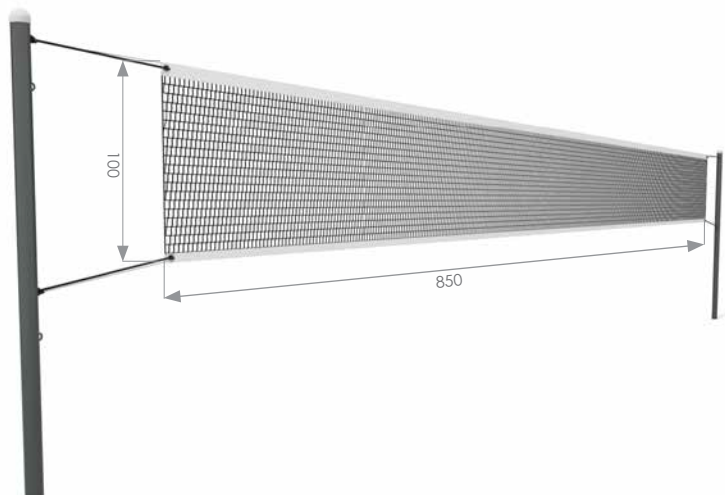

MODULE

S51-R7016

Dimensions: 305 x 96 x 6 cm

Dimensions of pipes and profiles used:
» pipe: Ø 33,7 x 2,9 mm

MATERIALS


- Construction of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.
- of System connectors made of strong aluminum alloy. Aluminum is secured by the process of electrophoresis and powder coating with polyester paint UV resistant and QUALICOAT attested.
- Plate made of triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp-proof and resistant to UV.

MODULE

S41-R7016

Dimensions: 160 x 6 x 225 cm

Dimensions of pipes and profiles used:
 » rectangular profile: 20x20x2 mm
 » pipe: Ø 33,7 x 2,9 mm

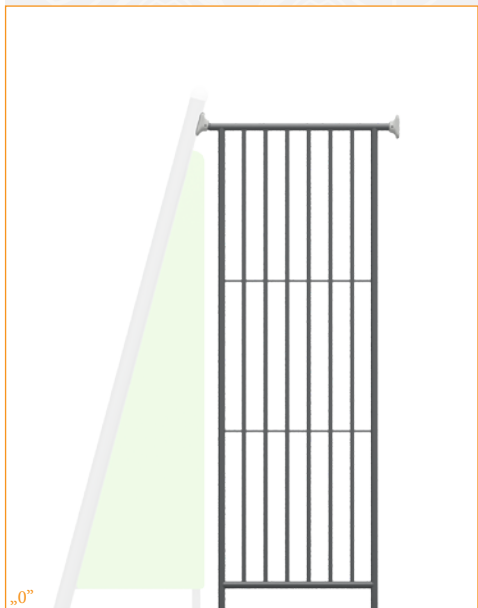


MODULE

S42-R7016

Dimensions: 160 x 6 x 225 cm

Dimensions of pipes and profiles used:
 » rectangular profile: 20x20x2 mm
 » pipe: Ø 33,7 x 2,9 mm

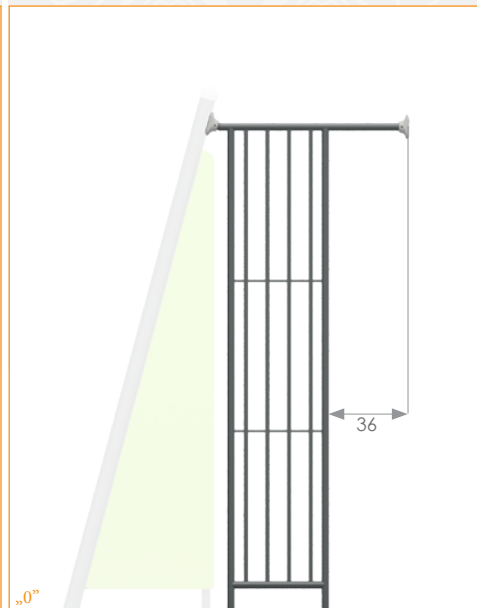


MODULE

S43-R7016

Dimensions: 160 x 6 x 225 cm

Dimensions of pipes and profiles used:
 » rectangular profile: 20x20x2 mm
 » pipe: Ø 33,7 x 2 mm

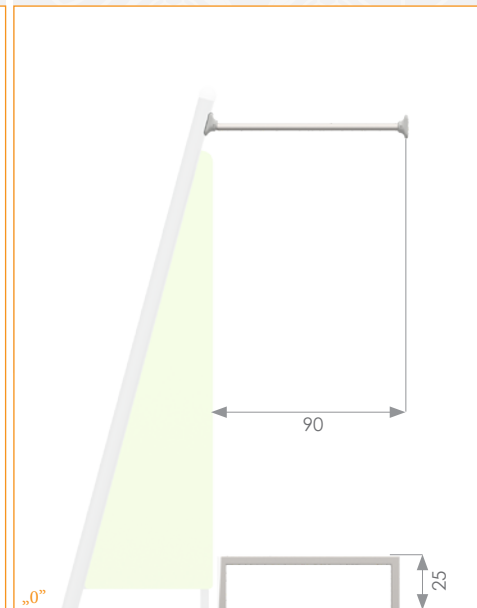


MATERIALS

- **Construction** of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.
- **System** connectors made of strong aluminum alloy. Aluminum is secured by the process of electrophoresis and powder coating with polyester paint UV resistant and QUALICOAT attested.
- **Cladding** made of triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp-proof and resistant to UV.

options of HDPE plates:



options of RAL:

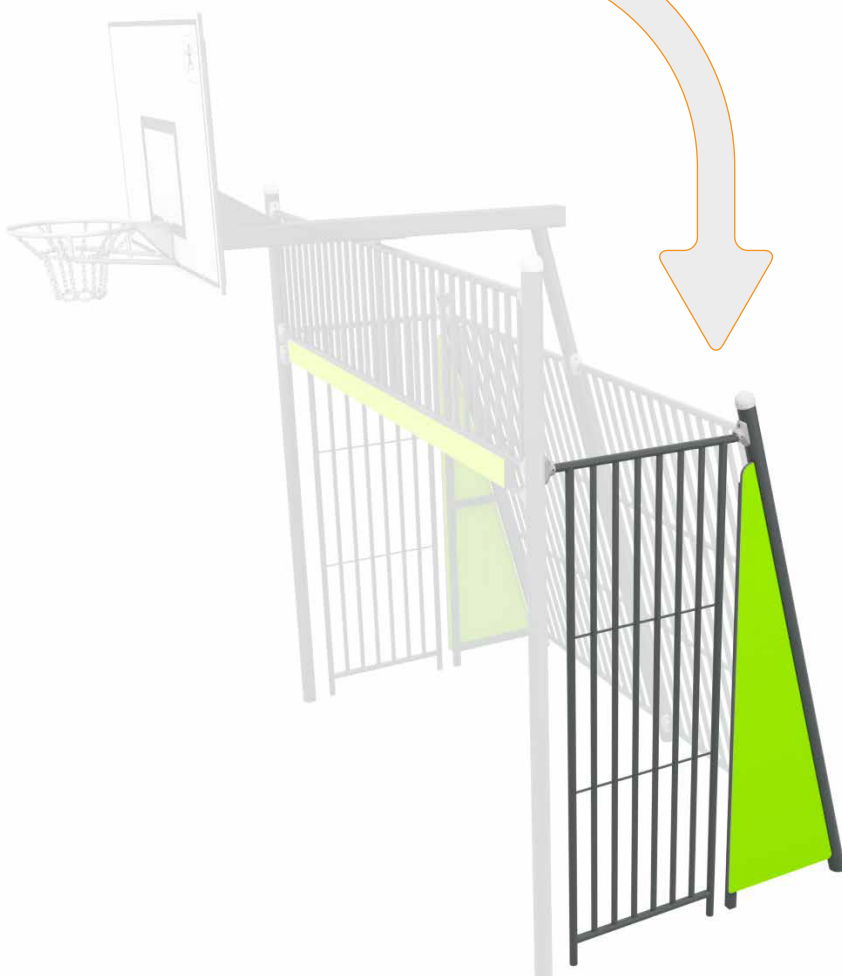

6031

Dimensions: 97 x 57 x 90 cm

Dimensions of pipes and profiles used:
» profile: 40x20x2 mm
» pipe: Ø60,3 x 2,9, Ø42,4 x 2,9 mm



MATERIALS

- **Construction** of 13 mm thick HPL, in the highest quality, totally damp-proof and resistant to UV.
- **Construction** of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.

6054

Dimensions: 50 x 43 x 90 cm
Pojemność: 45 L



MATERIALS

- **Construction** of 13 mm thick HPL, in the highest quality, totally damp-proof and resistant to UV.
- **Construction** of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.

6061

Dimensions: 210 x 58 x 61 cm

Dimensions of pipes and rods used:
» rod: 40x20x2 mm
» pipe: Ø 14 mm



MATERIALS

- **Construction** of hot-dip galvanised steel.

6310

Dimensions: 150 x 230 x 385 cm
Diameter of the basket hoop: 47,1 cm

Dimensions of pipes and profiles used:
» rectangular profile: 40x40x2 mm
» flat bar: 60x6 mm
» pipe: 20 x 2,5; 21,3 x 2; 17,2 x 2 mm
» supporting column: Ø 133x3,6 mm
» stainless steel chain: fi 5

MATERIALS

- **Construction** of triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp-proof and resistant to UV.
- **Construction** of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.
- **Construction** of stainless steel.

